

FIBERGLASS BAFFLE PANELS



- **Corrosion Resistant**
- **High Strength**
- **Lightweight**
- **Low in Maintenance**
- **UV Resistant**
- **Low Conductivity**
- **Dimensionally Stable**

Strongwell's lightweight, high strength fiberglass baffle panels are ideal for underwater flow control applications.

Fiberglass baffle panels are cost effective because they have a much longer life cycle than wood, concrete, steel and other traditional materials that are subject to rot and corrosion. The lightweight panels are easy to install and can be easily removed for cleaning and access.

Baffle panels are available in 12" and 24" widths for easy fabrication and installation of new systems or the rehabilitation of existing systems. Baffles can be mounted to existing columns, attached to H-beams or attached to concrete walls with clip angles.


Typical applications include:

- Municipal and industrial water and wastewater systems
- Aeration Chambers
- Contact Chambers
- Retention Basins

Materials of Construction

Baffle panels are available in 12" and 24" widths to offer flexibility in design and fabrication. A choice of resin systems is available. Standard panels are manufactured with a polyester resin which achieves a Class 1 ASTM E-84 rating. Strongwell

also offers a vinyl ester resin system for enhanced corrosion resistance and a resin system that meets NSF 61 requirements. Panels include a UV inhibitor and a surfacing veil for additional corrosion resistance and UV protection.

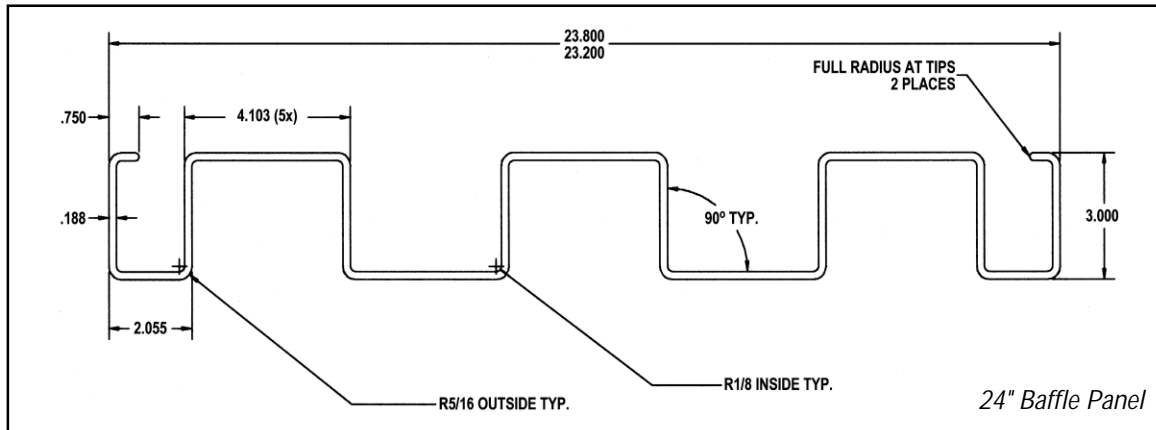

Fiberglass baffle panels are intended to replace wood, concrete or metal baffles in environments where corrosion or rotting creates costly maintenance problems.

24" Baffle Design Properties

$$I_{x-x} = 11.388 \text{ in}^4$$

Modulus of Elasticity $2.5 \times 10^6 \text{ psi}$

Typical Coupon Properties

Tensile Strength	42,000 psi	ASTM D638
Flexural Strength	32,000 psi	ASTM D790
Flexural Modulus	$1.5 \times 10^6 \text{ psi}$	ASTM D790
Water Absorption	.25%	ASTM D570
IZOD Impact (Notched)	25 ft. lbs./in.	ASTM D256
Compressive Strength	50,000 psi	ASTM D695



BRISTOL DIVISION

400 Commonwealth Ave., P.O. Box 580, Bristol, VA 24203-0580 USA
(276)645-8000 FAX (276)645-8132

CHATFIELD DIVISION

1610 Highway 52 South, Chatfield, MN 55923-9799 USA
(507)867-3479 FAX (507)867-4031

www.strongwell.com

R5M0104
©Strongwell